




TWO TYPES OF AG-TRACKS BY TAGEX GERMANY

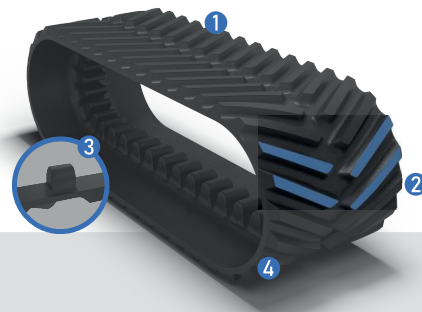


POSITIVE TYPE - FRICTION TYPE



Multilayer high strength wider cable

Thicker carcass resists cuts, punctures and other damage.

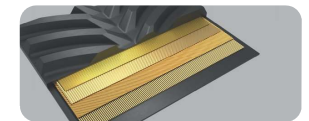

Engineered tread pattern

For the application scenario of AG machinery, special design tread improves the stability and smoothness of AG track.




Special rubber formula

Guide block with special rubber formula, strengthen the bearing surface structure design, improve the transmission efficiency and wear-resisting performance of AG track.



Fully-molded tread pattern

Fully-molded guide block, tread lug and carcass effectively ensure the performance of AG track, much stronger and more durable.

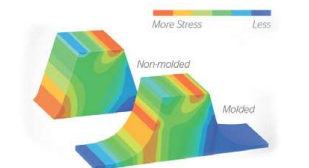

TAGEX

FRICTION DRIVE

Machine	Model	TAGEX Code	Width (mm)	Pitch (mm)	Links	Length (mm)	Guide Lugs	Tread Height (mm)	Tread Quantity (mm)	Warranty Period
CAT	35-55	25F8000	635	200	40	8000	80	70	80	48 month or 4.000 working hour
CAT	35-55	30F8000	762	200	40	8000	80	70	80	
CAT	65-95	25F8600	635	200	43	8600	43	70	86	
CAT	65-95	27.5F8600	698,5	200	43	8600	43	70	86	
CAT	65-95	30F8600	762	200	43	8600	43	70	86	
AGCO	MT700	25F8910	635	198	45	8910	45	70	90	
AGCO	MT700	30F8910	762	198	45	8910	45	70	90	
AGCO	MT738-743/938-943MT	25F9108	635	198	46	9108	92	70	92	
AGCO	MT738-743/938-943MT	30F9108	762	198	46	9108	92	70	92	
AGCO	MT800	25F10098	635	198	51	10098	102	70	102	
AGCO	MT800	30F10098	762	198	51	10098	102	70	102	
JOHN DEERE	9RT	30F9900	762	198	50	9900	100	70	100	
JOHN DEERE	9RT	35F9900	890	198	50	9900	100	70	100	
JOHN DEERE	8RT	25F9108	635	198	46	9108	92	70	92	
JOHN DEERE	8RT	30F9108	762	198	46	9108	92	70	92	
JOHN DEERE	8000T	25F8200	635	200	41	8200	82	70	82	
JOHN DEERE	8000T	30F8200	762	200	41	8200	82	70	82	
JOHN DEERE	8000T	35F8200	890	200	41	8200	82	70	82	
JOHN DEERE	9000T	30F9702	762	198	49	9702	98	70	98	
CLAAS	TERRATRAC	25F6800	635	200	34	6800	68	70	68	
CLAAS	TERRATRAC	27.5F6800	698,5	200	34	6800	68	70	68	
CLAAS	TERRATRAC	30F6800	762	200	34	6800	68	70	68	
CLAAS	TERRATRAC	35F6800	890	200	34	6800	68	70	68	
All Machine/Model: Steel Cord Fabric Layers -> 4 Steel Cord Diameter -> 5,4 Carcass Thickness -> 42										

POSITIVE DRIVE

Machine	Model	TAGEX Code	Width (mm)	Pitch (mm)	Links	Length (mm)	Drive Lugs	Tread Height (mm)	Tread Quantity (mm)	Warranty Period
JOHN DEERE	Combine	25P5947.5	635	152,5	39	5948	39	52	78	18 month
CASE COMBINE AXIAL		25P6405	635	152,5	42	6405	42	52	78	
CASE / NEW HOLLAND	Combine CR/CX Tractor	25P6710	635	152,5	44	6710	44	52	78	
NEW HOLLAND	Tractor	30P6710	762	152,5	44	6710	44	52	78	
All Machine/Model: Steel Cord Fabric Layers -> 4 Steel Cord Diameter -> 5,4 Carcass Thickness -> 35										